此。上海华伦电连接器

螺栓接线

• 6、10、16、24、32、48芯

● 电流: 16A

















■ 绝缘体

接触对数量: 6、10、16、24

 $32(2 \times 16) \cdot 48(2 \times 24) + PE$

HLE: 500V 16A 6KV 3 工作电流 工作电压 额定冲击电压

污染等级

400/690V -污染等级2也可 16A 6KV 2

依照UL/CSA工作电压 600V 绝缘电阻 $\geq 10^{10} \Omega$ 材料 聚碳酸脂

温度范围 -40°C ~ +125°C

可燃性, 依照UL 94 V-0


机械寿命 (测试) ≥500次


■ 接触对

材料 铜合金 表面-镀银 3 µm Ag $\leq 1 m \Omega$ 接触电阻 2.5 mm² 螺纹端接线 mm² **AWG** 14AWG -紧固/测试扭矩 0.5 Nm

■ 载流能力

随着环境温度的升高,连接器接触件芯数的增加等 原因,接触件的载流量应作相应的降低。





- ① HLE 6
- ② HLE 10
- ③ HLE 16
- 4 HLE 24

■ 防护罩壳

材料 铸铝合金 表面 粉末喷涂 按照IEC\EN60529外壳防护等级 IP65/IP67

■ 接线端螺栓连接



螺栓连接的拧紧力矩和检测力矩

导线截面	1.5	2.5	4	6	10	16
螺栓螺纹	М3	М3	M3.5	M4	M4	M6
检测力矩	0.5	0.5	0.8	1.2	1.2	1.2*
绞合线最小拉出力	40	50	60	80	90	60

* 用于无头固定螺栓HLK 4/8














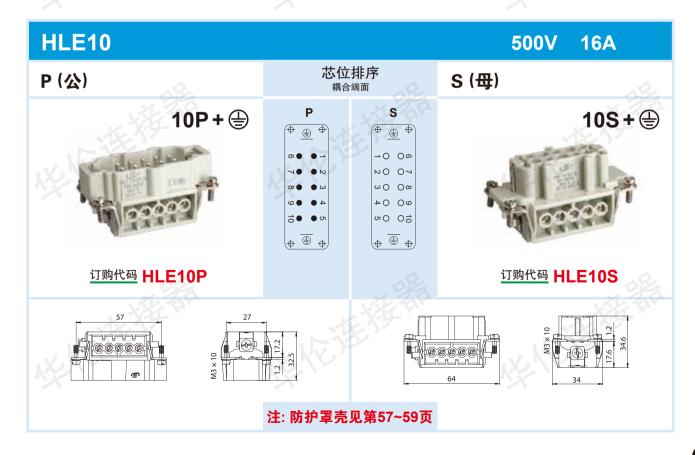











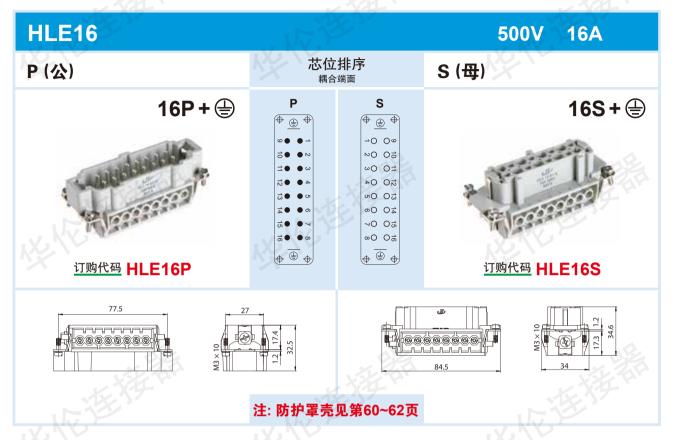

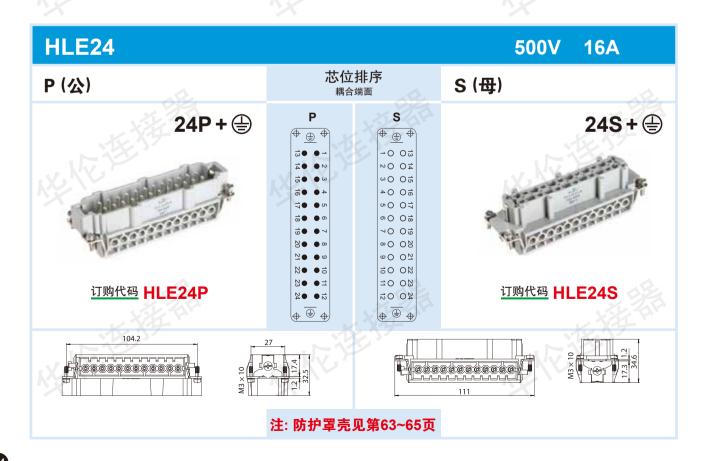












- E系列连接器



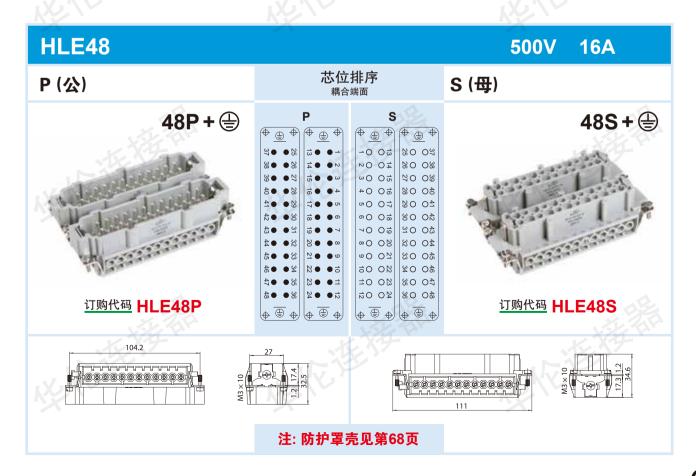








E系列防护外壳 E6 选配代码





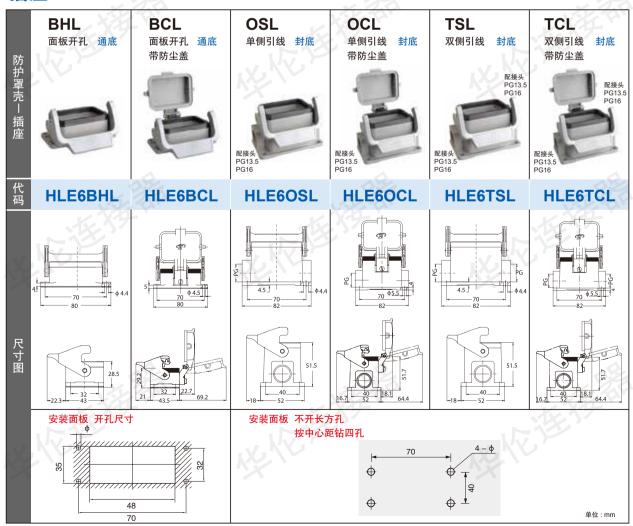













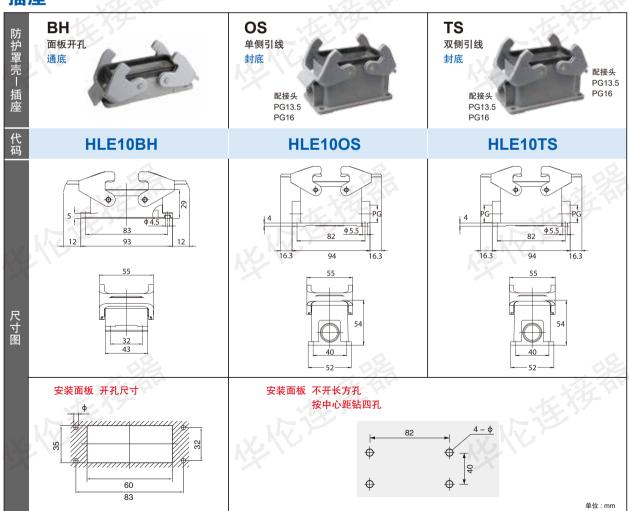




E系列防护罩壳 E10 选配代码








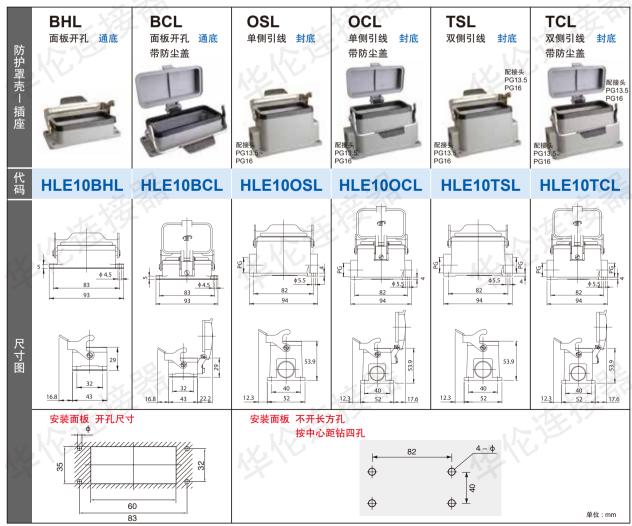

一 E系列防护罩壳 一

24.7



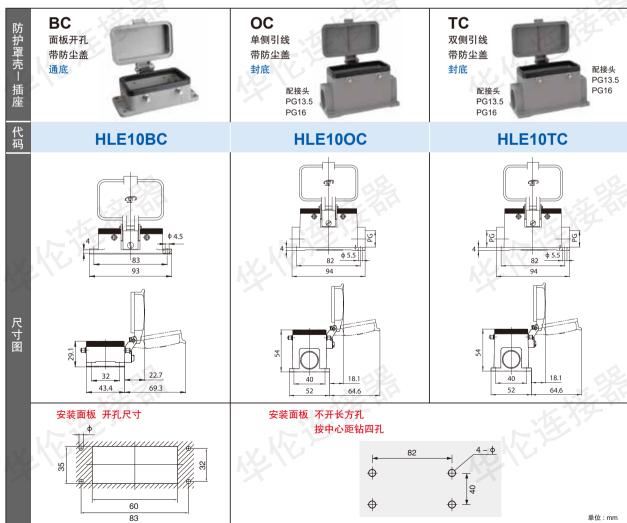
















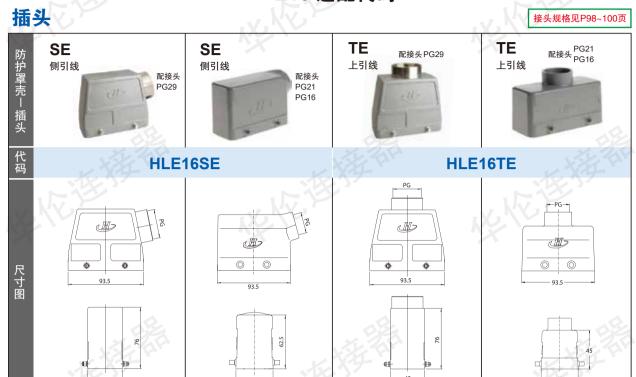

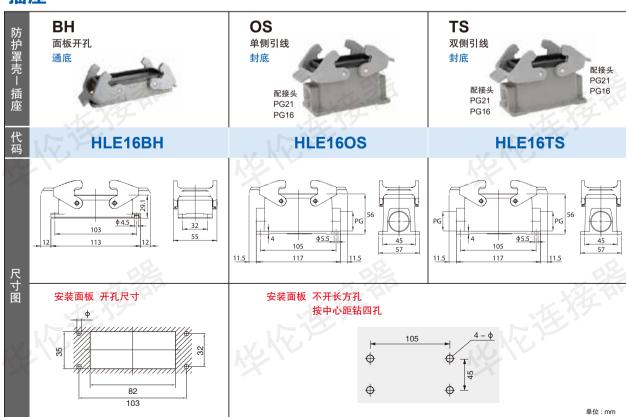






E系列防护罩壳 E16 选配代码



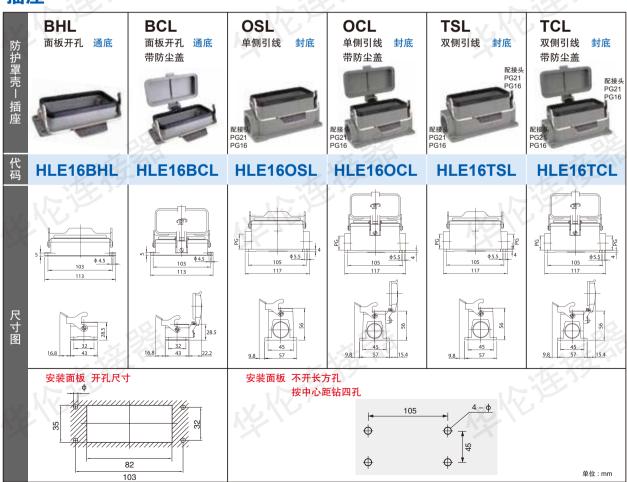











E系列防护罩壳 E16 选配代码

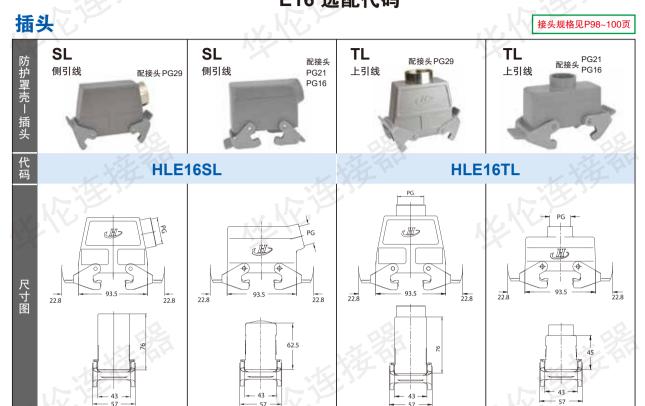




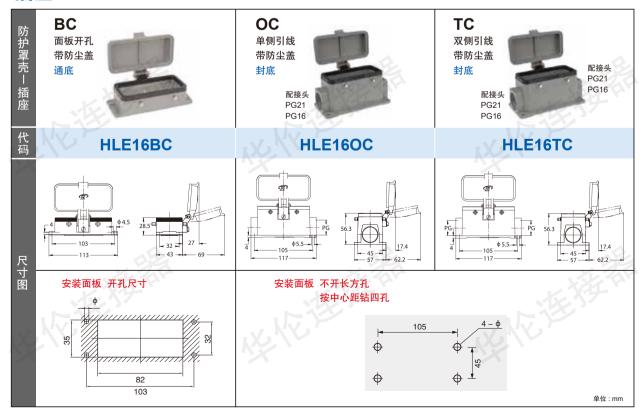














E系列防护罩壳 E24 选配代码



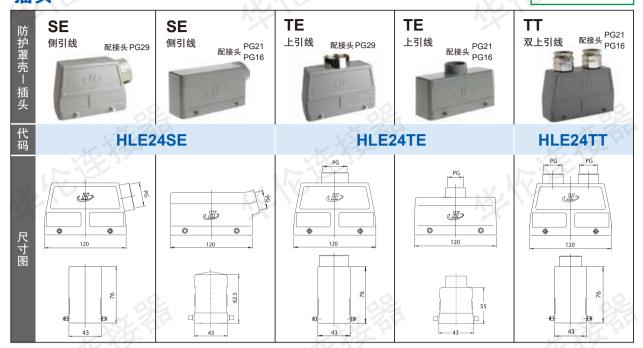

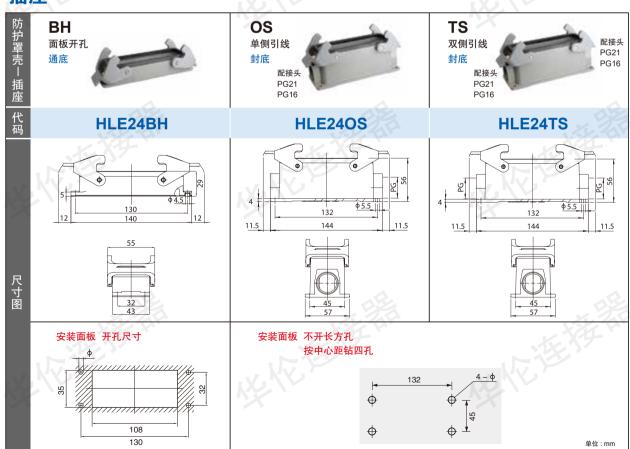














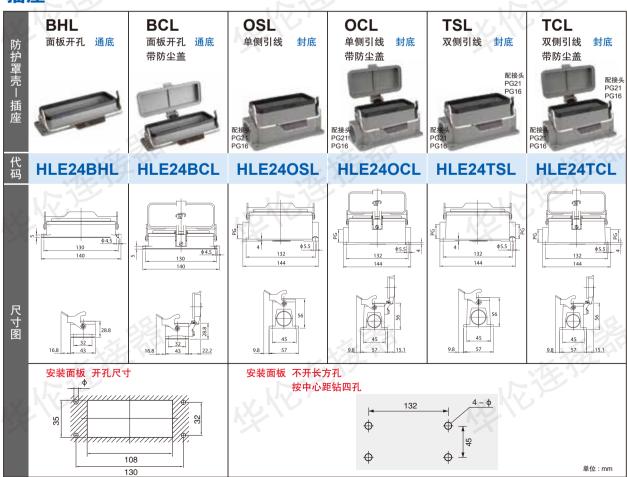

E系列防护罩壳 E24 选配代码

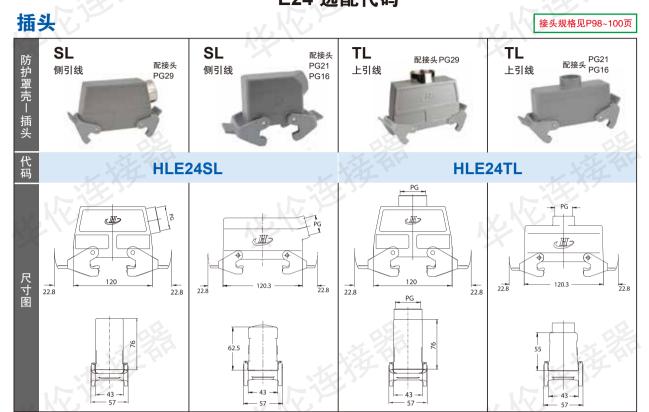

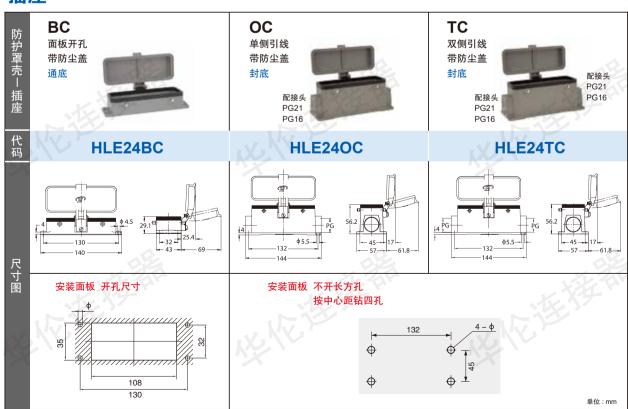








E系列防护罩壳 E32 选配代码



↟

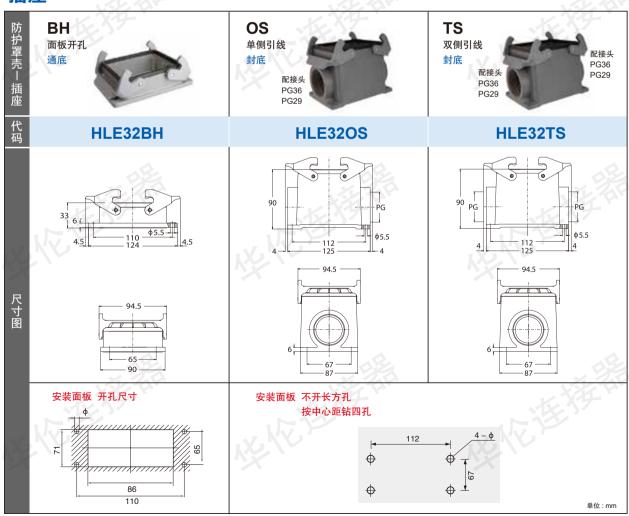












E系列防护罩壳 E32 选配代码



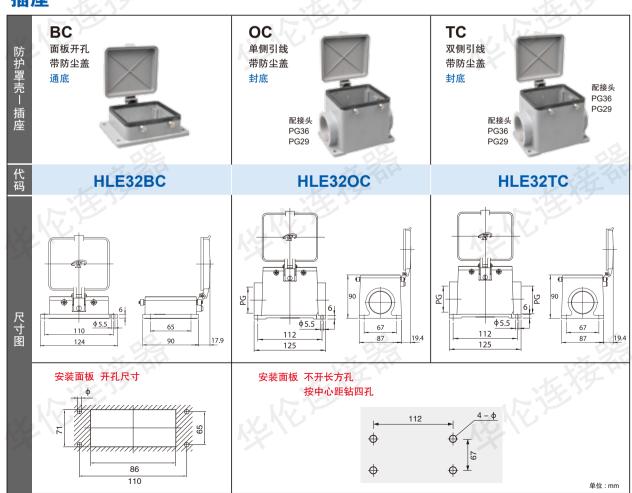







E系列防护罩壳



